



3915 Pressure Differential Covered Hoppers

**3915 CUBIC FOOT PRESSURE DIFFERENTIAL COVERED HOPPER
DESIGNED FOR COMMODITIES WEIGHING BETWEEN 34 AND 48.8 POUNDS PER CUBIC FOOT**

CUBIC CAPACITY: 3915 cu.ft.
EACH END COMPARTMENT: 1805 cu.ft.
CENTER COMPARTMENT: 705 cu.ft.

ROOF HATCHES: Five 20" inside diameter


DISCHARGE SYSTEM: Pressure Differential (15 psig maximum)
OUTLET: 4" quick coupler (male)
AIR SUPPLY CONNECTION: 3" quick coupler (male)
HEIGHT - TOP OF RAIL TO DISCHARGE OUTLET: 12 1/4"

HOPPER SLOPE: 50°

CENTER OF GRAVITY - LOADED CAR: 89.2"

TRUCKS: 100 tons
GROSS RAIL LOAD: 263,000 lbs.
LIGHTWEIGHT: 58,000 lbs.
PAYLOAD WEIGHT: Up to 195,000 lbs.
BEARINGS: Roller

MINIMUM HORIZONTAL CURVE NEGOTIABILITY:
COUPLED TO AAR BASE CAR: 236 ft.
COUPLED TO SIMILAR CAR: 241 ft.

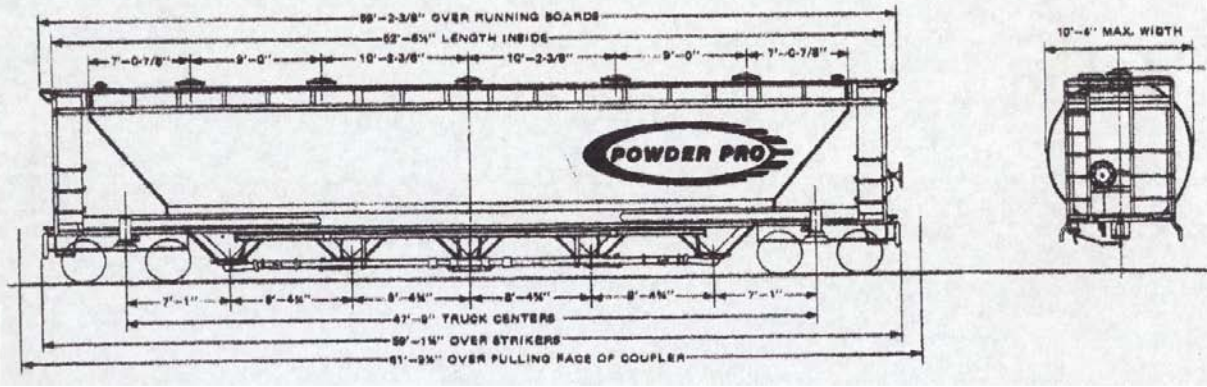




4379 E. Andover Avenue, Castle Rock, CO 80104

Ph: 720.733.9922

Fax: 720.733.9966

Email: julie@tealinc.com

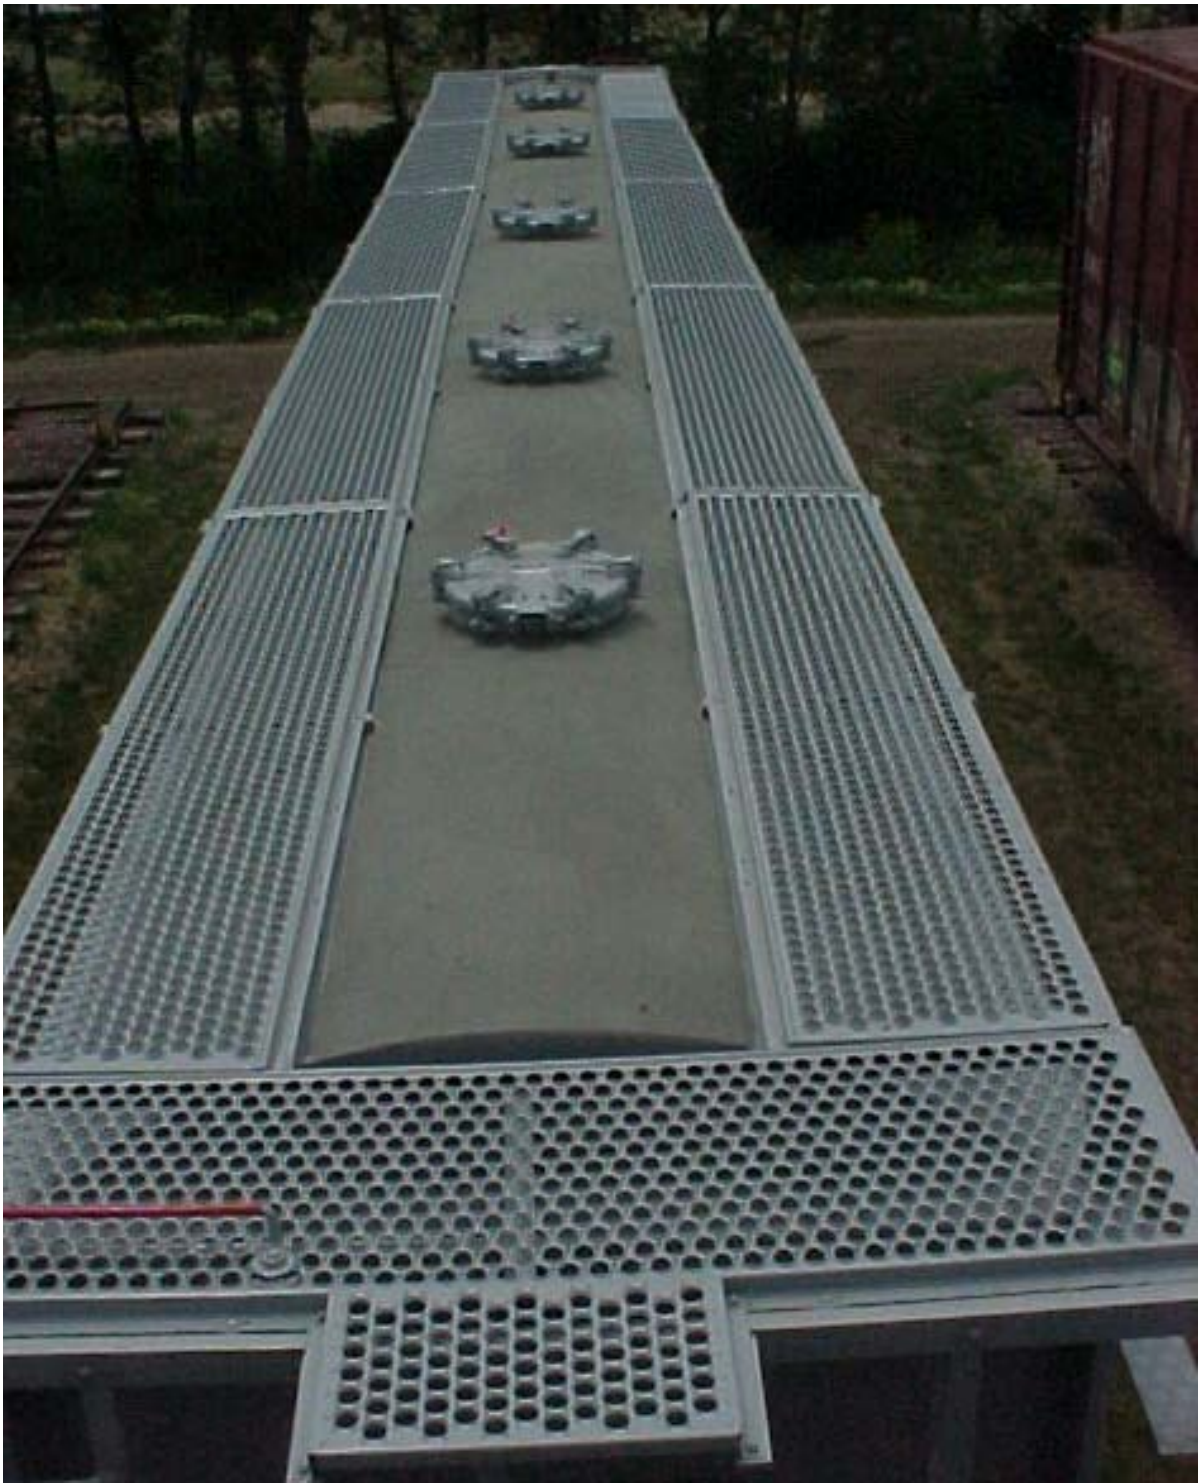

4379 E. Andover Avenue, Castle Rock, CO 80104

Ph: 720.733.9922

Fax: 720.733.9966

Email: julie@tealinc.com